




PCT/EP200 4 / 0 0 3 2 3 5



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

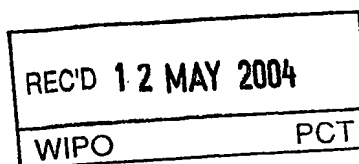

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed 

Dated 4 March 2004


BEST AVAILABLE COPY

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

RFW/ND/CB60165P

2. Patent application number

(The Patent Office will fill in his part)

0307445.7

01APR03 E796656-1 D02029
P01/7700 0.00-0307445.7

31 MAR 2003

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*

Patents ADP number *(if you know it)*

If the applicant is a corporate body, give the country/state of its incorporation

Glaxo Group Limited
Glaxo Wellcome House, Berkeley Avenue,
Greenford, Middlesex UB6 0NN, Great Britain

473587003
United Kingdom

4. Title of the invention

Novel Device

5. Name of your agent *(if you have one)*

"Address for service" in the United Kingdom to which all correspondence should be sent
(including the postcode)

Patents ADP number *(if you know it)*

Corporate Intellectual Property

GlaxoSmithKline
Corporate Intellectual Property (CN9 25.1)
980 Great West Road
BRENTFORD
Middlesex TW8 9GS

7960982003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and *(if you know it)* the or each application number

Country	Priority application number <i>(if you know it)</i>	Date of filing <i>(day / month / year)</i>
---------	--	---

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer yes if:*

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is named as an applicant, or
- c) any named applicant is a corporate body

See note (d)

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form

Description ☒ 13
Claim(s) ☒ 4
Abstract ☒
Drawings ☒ 4

only

8

10. If you are also filing any of the following, state how many against each item.

Priority Documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

We request the grant of a patent on the basis of this application

Signature

Ralph Walker

R-F Walker

Date 31-Mar-03

12. Name and daytime telephone number of person to contact in the United Kingdom

R F Walker 020 80474485

Warning

After an application for a Patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission unless an application has been filed at least six weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- f) For details of the fee and ways to pay please contact the Patent Office.

This invention relates to a novel device for dispensing fluid products from a pressurised container. In particular the invention relates to an actuator device for actuating the valve of a pressurised container.

Household fluids such as shaving foams, hair mousse etc. are often provided contained in a pressurised dispensing container. Such containers have become commonplace and standardised and comprise a container, usually of metal, able to withstand the internal pressure and having a dispensing valve with an exit opening for the fluid. Externally of the container such valves normally comprise a short tube, generally known in the art as the valve "stem" with the exit opening at its end remote from the container, and which can be actuated by application of actuating force to the valve stem.

Generally there are two types of such valve. With a first type of valve the actuating force moves the valve stem along the valve stem longitudinal axis toward the container against a closing bias. With a second type of valve, the so called "toggle" or "tilt" valve, the actuating force moves the valve stem transverse to the valve stem axis toward the container against a closing bias. Internally the valve has a mechanism, unrelated to this invention, which responds to such movement to open the valve.

Normally an actuator is fitted to the stem, comprising an operating button, handle or lever etc. which the user can operate to apply actuating force to the valve stem. Normally such an actuator has a part which mates with the valve stem and includes a flow conduit to direct the flow of fluid when it has exited from the valve toward a dispensing opening of the actuator. Often the actuator can be mounted on the pressurised container by for example a snap fit, and often comprises a cover for the valve stem.

Foams may be dispensed from such a pressurised container. Within the container the foam composition includes a propellant, normally a liquefied gas such as butane or propane or a halocarbon. Opening of the valve causes the pressure within the container to drive the foam composition out through the valve stem and through the flow conduit of the actuator. As the propellant meets atmospheric pressure in the valve stem and flow conduit the propellant expands to form numerous small bubbles

and so expand the foam. A particular type of such a fluid foam is a foamable dentrifice composition e.g. as disclosed in DE-A-100 08 837, and for example US-A-3,612,706 discloses a dispensing container for a foamable dentrifice which allows the dentrifice to flow to a toothbrush head.

A problem when dispensing foams in this way from pressurised containers is that when the valve is closed after use a volume of residual foam composition remains within the valve stem and the flow conduit. Propellant remaining in this residual composition expands the residual composition causing it to ooze out of the dispensing opening, resulting in an unsightly mess. This phenomenon is called "post foaming" in the art. Dispensers which address the problem of post foaming are known. EP-A-0699597 discloses a foam dispenser provided with a collecting cavity for residual composition expelled from the dispenser. WO-A-02/48004 discloses a dispenser in which a waste containment region is provided for excess foam. US-A-5,305,930 discloses a foam dispenser in which a closure, i.e. a poppet valve is positioned immediately the dispensing opening and is opened by the operation of the actuator, trapping excess foam between the closure and the valve of the pressurised container on which it is mounted.

It is an object of the present invention to provide a novel actuator which addresses the problem of post foaming, being simpler than the state of the art, and a novel dispenser comprising a container fitted with such an actuator.

According to this invention a dispenser for a foamable composition is provided, comprising,

- a container containing the foamable composition under pressure, the container having a valve stem with an exit opening for the composition at its end remote from the container, and which can be moved by application of actuating force to the valve stem to thereby release the composition,

- an actuator mounted on said container and by which a user can apply actuating force to the dispensing valve, the actuator comprising,

- a flow conduit defining an upstream to downstream flow path for the foamable composition, having a downstream dispensing opening and mated at an upstream end with the valve stem,

- the flow conduit being displaceable upon the application of actuating force to the actuator to thereby bear upon the valve stem to actuate the valve stem,

means to communicate actuating force to the flow conduit,
a closure adjacent to the dispensing opening, wherein
in the absence of actuating force the flow conduit is biased into a closed
relationship with the closure to obstruct flow of composition through the dispensing
opening,

on the application of actuating force to the flow conduit the flow conduit is
displaced to actuate the valve stem and the flow conduit is displaced out of its closed
relationship with the closure to allow flow of composition through the dispensing
opening.

In this description the direction from the valve toward the dispensing opening
is termed "downstream" and the opposite direction is termed "upstream". Normally
the dispenser will be operated with the valve stem downwards, i.e. inverted, this being
a better orientation for application of a foaming dentrifice to a toothbrush. Normally,
to be operated in this inverted orientation the dip tube which is frequently present
within such pressurised containers is omitted.

The actuator of the invention works by trapping the residual foamable
composition in the flow conduit between the closed valve and the closure when the
actuating pressure is released and the flow conduit and closure return under the action
of the bias to their closed relationship. This trapped composition can then gradually
break down into a small volume of liquid, e.g. as the propellant slowly evaporates and
escapes, without oozing through the dispensing opening. Therefore it is preferred that
the closure is at or immediately downstream of the dispensing opening so that no
composition, or only a minimal quantity of residual composition, resides downstream
of the closure when in the closed relationship.

The flow conduit is suitably generally tubular in form, with an internal
longitudinal bore along which the composition flows.

In a first embodiment suited to the first type of valve in which the actuating
force moves the valve stem along the valve stem axis toward the container against a
closing bias, the flow conduit may have a downstream open end and be wholly or
partly displaceable along the direction of the stem axis, and the closure may be
located adjacent to this downstream open end, so that in its closed relationship the
closure obstructs this downstream open end.

In one form of this first embodiment the flow conduit may comprise a first conduit mated with the valve stem, and a second conduit having a downstream open end, the first conduit and second conduit comprising two telescoping sleeves, with one of the respective first conduit and second conduit being a conforming sliding fit within the tubular bore of the other, the closure may be adjacent a downstream open end of the second conduit, and the first conduit may be slideably displaceable relative to the second conduit,

so that in the absence of actuating force the first conduit is biased into a closed relationship with the closure to obstruct flow of composition through the downstream opening, and

on the application of actuating force to the first conduit the first conduit is displaced to actuate the valve stem and the first conduit is displaced out of its closed relationship with the closure to allow flow of composition through the dispensing opening.

In this form of the first embodiment the first and second conduit together comprise the flow conduit. The sliding fit should be such that the respective conduits make a substantially fluid tight connection. For example preferably the first conduit may fit slidably generally coaxial within a tubular bore of the second conduit and can slide reciprocally along the tubular bore of the second conduit. Alternatively the second conduit may fit slidably generally coaxial within a tubular bore of the first conduit and can slide reciprocally along the tubular bore of the first conduit.

In a second embodiment suited to the second type of valve in which the actuating force moves the valve stem transverse to the axis of the valve stem, the flow conduit may have a downstream open end and be displaceable in a direction transverse to the direction of the stem axis, and the closure may be located adjacent to this downstream open end, so that in its closed relationship the closure obstructs this downstream open end.

In one form of this second embodiment the flow conduit may comprise a first conduit mated with the valve stem, and a second conduit flexibly linked to the first conduit and having the downstream open end, and the second conduit may be displaceable in a direction transverse to the direction of the stem axis so that such displacement is communicated to the first conduit and thereby to the valve stem. For example the second conduit may be supported in a swivelling manner adjacent to the

downstream open end, e.g. by a bearing such as a spherical bearing or a flexible support allowing the displacement. For example the first conduit may be flexible, e.g. a flexible tube, mated at respectively its upstream end and downstream end with the valve stem and the second conduit.

In both embodiments the flow conduit may mate with the valve stem by a tight friction fitting, as is standard in the art, e.g. having an upstream open end with which the valve stem can mate in a male-female manner. Internally the flow conduit may for example have an abutment ledge to abut against the upper end of the valve stem to facilitate the communication of actuating force in the first embodiment from the flow conduit to the valve stem and/or to limit the extent of mating.

In both embodiments the closure may be located in the flow conduit between the valve and the dispensing opening, but preferably the closure is located at the dispensing opening or immediately upstream thereof so that with the closure closed as much as possible of any residual foamable composition is trapped in the flow conduit upstream of the closure.

The closure may for example comprise any conventional closure system which, in the absence of actuating force operates to close the flow conduit when the flow conduit is biased against the closure.

For example such a system may comprise apertures in the flow conduit which are out of communion in the closed relationship and are brought into communion on displacement of the flow conduit.

For example the closure may comprise a flap or other type of valve in the flow conduit, for example such a valve at the downstream open end of the conduit.

Preferably the closure comprises an obstructor part, and the obstructor part and conduit are biased together in the absence of actuating force into a closing relationship and are brought out of this closing relationship on displacement of the flow conduit.

In the first embodiment for example the closure may comprise an obstructor part adjacent to the dispensing opening, against which the downstream open end of the flow conduit, e.g. the first conduit may be biased. By such a construction the residual foamable composition may be trapped entirely within the flow conduit, e.g. within the first conduit. Such an obstructor part may for example comprise a conical part with its apex pointing upstream, and engaging in a closing relationship with an

end opening of the flow conduit, e.g. the first conduit, which may be correspondingly conically profiled.

In the second embodiment for example the closure may comprise an obstructer part, and the conduit is brought out of the closing relationship with the obstructer part as the second conduit is displaced transverse to the valve stem axis. For example the closure may comprise a closure surface and the second conduit may have a rim at its downstream open end, which abuts against the closure surface to close the conduit in the closed relationship and which tilts out of the closing relationship on displacement.

The closure and/or the flow conduit may include elastomer compression sealing washer parts to enhance the seal between the conduit and the closure in the closed relationship, for example being compressed between the closure and the flow conduit.

The bias of the flow conduit into its closing relationship may be provided by a spring, for example biased to urge the flow conduit against the closure in the closed relationship. Such a spring may for example comprise a metal or plastics material coil spring, for example encircling the flow conduit, for example in the first embodiment encircling the first conduit, and bearing against an abutment part of the flow conduit and against the container or another part of the actuator. Such a spring may be made of plastics material and may be made integrally with the flow conduit or another part of the actuator. Alternatively such a spring may comprise a resilient elastomer member acting to apply bias by its elasticity. When in the second embodiment the first conduit comprises a flexible tube this tube may be resilient and may apply a bias resulting from its resilience. Numerous alternative biasing mechanisms will be apparent to those skilled in the art. The valve stem of conventional containers is normally biased closed, and this itself may serve to apply a bias to a flow conduit mated to the valve stem. For example a valve of the first type mentioned above is normally biased to apply a biasing force in the downstream direction.

Preferably the actuator is mounted on the container by a snap or friction fit engagement with the container, which is standard in the art, many pressurised containers being made with a convenient ridge, groove etc. to enable such a snap fitting. Suitably for example the actuator may comprise a cover part generally in the form of a cover for the part of the container that includes the valve stem, having a lower skirt provided with a bead which can engage with such a ridge or groove. Such

a part may for example have an upper part defining the dispensing nozzle. For example in the first embodiment the second conduit, with the dispensing opening at its downstream end may be integrally made with such a part. For example the part may be generally of a funnel-shape having such a lower skirt and narrowing to integrally comprise the dispensing opening. Such a part may include for example a support part etc. upon which the above-mentioned biasing means may bear. Numerous other constructions will be apparent and may be based on aesthetic considerations.

Numerous means will be apparent to those skilled in the art by which a user may apply actuating force to the actuator, so that such force is communicated to the flow conduit. For example a handle, lever or button part may extend through for example an aperture in a cover part of the actuator, to which the user may apply actuating force and which bears upon the flow conduit, e.g. upon the first conduit of the first embodiment, so that the actuating force which is then transmitted to the flow conduit. Such a means may also be the means by which the bias is applied to the flow conduit to bias it into the closing relationship with the closure, for example by a biasing means applying its bias to the means by which a user applies actuating force to the actuator, and this bias being communicated to the flow conduit. Handles, levers and buttons of this general type are well known in the actuator art.

The actuator may be made of plastics materials as is common in the art.

The dispensing opening may comprise a conventional nozzle out of which the foamable composition may be dispensed. Alternatively the dispensing opening may comprise an applicator for the composition. For example if the foamable composition is a foamable dentrifice composition the dispensing opening may comprise part of a toothbrush head, in a manner analogous to US-A3,612,706.

The invention also provides an actuator mountable on a container containing a foamable composition under pressure, the container having a valve stem with an exit opening for the composition at its end remote from the container, and which can be moved by application of actuating force to the valve stem, and by which a user can apply actuating force to the dispensing valve,

the actuator comprising,

a flow conduit defining an upstream to downstream flow path for the foamable composition, having a downstream dispensing opening which can be mated at an upstream end with the valve stem,

the flow conduit being displaceable upon the application of actuating force to the actuator to thereby bear upon a mated valve stem to actuate the valve stem, means to communicate actuating force to the flow conduit, a closure adjacent to the dispensing opening, wherein in the absence of actuating force the flow conduit is biased into a closed relationship with the closure to obstruct flow of composition through the dispensing opening,

on the application of actuating force to the flow conduit the flow conduit is displaced to actuate a mated valve stem and the flow conduit is displaced out of its closed relationship with the closure to allow flow of composition through the dispensing opening.

Embodiments and preferred features of such an actuator are as described above.

The construction and operation of the device of this invention will now be described and illustrated by way of non limiting example with reference to the accompanying figures which show.

Fig. 1 a typical pressurised container.

Fig. 2 the container of Fig. 1 fitted with an actuator in a closed relationship.

Fig. 3 the container of Fig. 1 fitted with an actuator in an open relationship.

Fig. 4 an alternative construction of flow conduit.

Figs. 5, 6, 7, 8, 9, 10 and 11 alternative constructions of the actuator.

Referring to Fig. 1 a typical pressurised container 10 is shown overall. The container 10 comprises a cylindrical container 11 provided with a valve stem 12. The valve stem 12 is either of a standard type which is opened by a downward movement toward the container 11 along the longitudinal axis direction of the stem, or an alternative standard type ("toggle valve") which is opened by a sideways movement of the stem 12. The container 11 is provided externally with an annular groove 13, and an annular ridge 14 around the junction of the valve assembly and the container 11. The container 11 contains a pressurised dentrifice composition (not shown). Internally the container 11 may include a dip tube 15 reaching to near the bottom of the container 11, but which may be omitted if the container is used in its inverted configuration.

Referring to Fig. 2 an actuator 20 (overall) of the preferred embodiment is shown in longitudinal section mounted onto the container 10.

The actuator 20 comprises a cover part 21 in the form of a generally bell-shaped cover over the valve stem 12. The bell shaped cover 21 is made of resilient plastics material, and at its lower end is in the form of a cylindrical skirt 22 provided with an internal bead 23 which snap fits into the groove 13. It is equally feasible that the bell shaped first part 21 could be made to snap fit around the ridge 14.

The upper part of part 21 narrows to integrally comprise a tubular second conduit 24 with a dispensing opening 25 at its downstream end. Internally the second conduit 24 has a cylindrical internal bore 26 terminating at upstream open end 27.

Within the part 21 is a part 30 (overall) which comprises a first conduit 31 having an internal tubular bore 32. The conduit 31 has an open upstream end 33 which is able to mate in a fluid-tight fit with the valve stem 12, and an open downstream end 34. Conduits 24 and 31 together form the flow conduit, so that fluid composition exiting the valve 12 can flow in an upstream toward downstream flow path direction from the valve 12 to the dispensing opening 25 along the bores 26, 32.

The first conduit 31 and second conduit 24 are in the form of two telescoping coaxial cylindrical sleeves, the external surface of the first conduit 31 being a conforming sliding, fluid-tight fit within the tubular bore 26 of the second conduit 24. The first conduit 31 may slide reciprocally along the tubular bore 26 of the second conduit 24 whilst maintaining the fluid-tight seal between them. If necessary a separate sealing means may be provided between the first 31 and second 24 conduits, e.g. a sealing washer.

Therefore with the cover part 20 attached to the container 11 and the first conduit 31 mated with the valve stem 12 the part 30 and hence first conduit 31 can be moved in a sliding manner relative to the second conduit 24 toward the container 11 to bear upon the valve stem 12 and open the valve. A pressurised composition in the container 11 can then flow through the respective tubular bores 26,32 toward the dispensing opening 25.

A closure 40 is positioned immediately adjacent to the dispensing opening 24. The closure 40 is in the form of a conical obstructer part, positioned with its apex downward, so that when the first conduit 31 is in its most downstream position as shown in Fig. 2 the downstream open end 34 of the first conduit abuts against the

closure 40 to close the first conduit 31. The closure 40 is supported on small spider legs 41 allowing material from the container 11 to flow between them through the dispensing opening 25.

Around the upstream end of the part 30 is a helical biasing spring 50 which bears expansively against the upper part of container 11 and an abutment part 35 extending perpendicularly from the upstream-downstream axis direction of the first conduit 31, to bias the upper open end 34 of the second conduit in the downstream direction against the closure 40. For example part 35 may be a circular flange surrounding the conduit 31 or radial spider legs.

Within cover 21 is a bent operating lever 60, which extends through an aperture 28 through the cover 21. Operating lever 60 is shown in a plan view in Fig. 2A, and is seen to have an aperture 61 through which is threaded the second conduit 31.

As shown in Fig. 3, actuating force may be applied by a user to the part 63 of the lever 60 which extends outside of the aperture 28. This causes the lever 60 to rotate about fulcrum 63 and to communicate this actuating force to the upper surface of abutment part 35 of the part 30. As seen in Fig. 3 this forces the part 30 in the upstream direction, compressing spring 50, to both open the valve 12 and to force the closure 40 and end 34 of the first conduit 31 apart to open the dispensing opening 25, allowing fluid content to flow out of the container 11, through the flow conduit 24,31 and out through the dispensing opening 25.

When actuating force on the lever 60 is released, the spring 50 expands, forcing the part 30 in the downstream direction, allowing the valve 12 to close, and returning the first conduit 31 into the closed relationship with closure 40 as shown in Fig. 2. This cuts off the flow of the composition, e.g. the foamable dentrifice, at the dispensing opening 25, and also traps a small residual volume of the composition within the first conduit 31, i.e. between closure 40 and valve 12. This residual composition cannot then escape through dispensing opening 25. Although the fit of the conduit 31 within the bore 26 is substantially fluid-tight, manufacturing tolerances etc. allow slow escape of the propellant vapour from this trapped composition e.g. between the conduits 24,31. This causes the trapped foamable composition to slowly degrade into an insignificant volume of liquid, which evaporates or is expelled through the dispensing opening 25 when the actuator is next operated.

Fig. 4 shows an alternative construction of an actuator of the invention in which the second conduit 24 is bent to deliver material out of dispensing opening 25, and the closure 40 is positioned adjacent the bend. Other alternative constructions will be apparent.

Fig. 5 shows an alternative construction of part 30 in which the helical spring 50 is replaced by plural spring legs 51 integral with the part 30. Alternative constructions of bias spring will be apparent, for example spring legs (not shown) integral with first part, or an elastomer member (not shown) applying bias to part 30. Fig 5 also shows the downstream open end 34 of first conduit 31 provided with a compressible elastomeric sealing washer 36 to enhance the seal with closure 40.

Referring to Figs. 6 and 7 two alternative ways of enabling actuating force to be applied to the part 30 and first conduit 31 are shown. In Fig. 6 the part 30 is partly enclosed by a cover 70 which is exposed through aperture 28 in the bell-shaped part 21. Actuating force may be applied to the cover 70, to move cover 70 downwardly relative to the first part 21, and thereby cause the cover 70 to bear upon the part 30 and move second part 30 downwardly, to operate the device in a manner analogous that that described above. In Fig. 7 the part 30 is integrally made into an operating button 71 which is exposed through aperture 28 in the bell shaped part 21, and which a user may depress to move part 30 downwardly, to operate the device in a manner analogous that that described above. Alternative ways of enabling actuating force to be applied to the part 30 will be apparent to those skilled in the art.

Referring to Figs. 8 and 9, two alternative constructions of closure are shown. In Fig. 8 the closure 81 is located within the second conduit 24, made integrally with a small fin 82. In Fig. 9 the closure 91 comprises a flap valve integrally hinged to the rim of the downstream open end of first conduit 31. As shown in Fig. 9A, with the part 30 biased in the downstream direction, analogous to Fig. 2, the flap 91 abuts against small fin or spider leg 92 projecting across the bore 26 of the second conduit 24. When as in Fig. 9B the part 30 is moved in the upstream direction in a manner analogous to Fig. 3 the flap 91 is distanced from fin or leg 92 and is opened, for example by the pressure of the composition flowing out of the valve 12 and along the first conduit 31, and/or by the flap 91 catching on part of the inner surface of second conduit 24, so that the composition can flow along the conduits 24,31 and out through the dispensing opening 24.

Referring to Fig. 10 another alternative construction of actuator is shown. The valve stem 12 is again of the type which is opened by movement toward container 11 along the valve stem axis. The actuator 100 overall comprises parts in common with Figs 2 and 3 which are numbered correspondingly. In the construction shown in Fig. 10 the flow conduit 101 is a one-piece conduit and has a downstream open end 102 which comprises the dispensing opening. The conduit 101 is displaceable along the direction of the stem axis in a manner analogous to the part 30 and first conduit 31 of Figs. 2 and 3. A closure 40 analogous to that 40 of Figs 2 and 3 is supported on spider legs 105 adjacent to this downstream open end, so that in its closed relationship as shown the closure 40 obstructs the downstream open end 102 of flow conduit 101. When the part 30 and conduit 101 are displaced downwardly by the action of lever 60 in a manner analogous to Fig. 3 the open end 102 is displaced out of the closing relationship with closure 40 to allow composition to flow out of the dispensing opening 102. When actuating force on lever 60 is released the spring 50 returns the conduit 101 to the closed relationship with closure 40, to close conduit 101 and trap residual composition within bore 106 of conduit 101 analogously to the above. An elastomer ring seal 107 may be located between conduit 101 and the rim of an upper opening 108 in part 20 through which conduit 101 extends.

Referring to Fig. 11 another alternative construction of actuator 110 is shown. The valve is of the type in which the valve stem 12 is moved transverse to the axis of the valve stem to open it. Fig. 11 shows an upright closed position and Fig 11A shows both the upright closed position of valve stem 12, and the tilted open position 12A. Parts corresponding to the preceding figures are numbered correspondingly.

A flow conduit 111 generally comprises a first conduit 112 mated with the valve stem 12. First conduit 112 is flexible, being a flexible tube mated at its upstream end with valve stem 12. The downstream end of conduit 112 is mated in a fluid tight fit with a second conduit 113, which is a rigid tubular conduit having a downstream open end 114. Adjacent to open end 114 is a closure 115 supported on spider legs 116. Closure 115 comprises a closure plate against which the open end 114 is biased into a closed relationship. The flexible tube 112 provides the bias, being made of an elastomer, and may be made in a bellows form to enhance the bias. Second conduit 113 is displaceable in a direction transverse to the direction of the stem 12 axis so that such displacement is communicated to the first conduit 112 and thereby to the valve

stem 12. This is achieved by supporting the second conduit 113 in a swivelling manner adjacent to the downstream open end 114 by a flexible support being a ring-shaped elastomeric washer 117 allowing the displacement. Through aperture 28 in the cover 20 extends an operating button 118 which engages with conduit 113 e.g. by means of a forked end fitting around conduit 113. When button 118 is moved by pressure applied by a user in the direction shown by the arrow it causes conduit 113 to tilt so that the seal between end 114 and closure 115 is opened, and at the same time conduit 112 and hence stem 12 is displaced transverse to the axis of stem 12, thereby opening valve 12 and allowing flow of composition out of container 11 through flow conduit 111 and through open end 114 for use. When pressure on button 118 is released the bias from flexible conduit 112 returns the conduit 113 to its closed relationship with closure 115, and the bias of the valve stem 12 returns stem 12 to its upright closed position. Residual composition in flow conduit 111 is trapped between closed valve 12 and closed closure 115, and slowly breaks down without oozing past closure 115.

Claims.

1. A dispenser for a foamable composition comprising,
a container containing the foamable composition under pressure, the container having a valve stem with an exit opening for the composition at its end remote from the container, and which can be moved by application of actuating force to the valve stem to thereby release the composition,
an actuator mounted on said container and by which a user can apply actuating force to the dispensing valve, the actuator comprising,
a flow conduit defining an upstream to downstream flow path for the foamable composition, having a downstream dispensing opening and mated at an upstream end with the valve stem,
the flow conduit being displaceable upon the application of actuating force to the actuator to thereby bear upon the valve stem to actuate the valve stem,
means to communicate actuating force to the flow conduit,
a closure adjacent to the dispensing opening, wherein
in the absence of actuating force the flow conduit is biased into a closed relationship with the closure to obstruct flow of composition through the dispensing opening,
on the application of actuating force to the flow conduit the flow conduit is displaced to actuate the valve stem and the flow conduit is displaced out of its closed relationship with the closure to allow flow of composition through the dispensing opening.
2. A dispenser according to claim 1 wherein residual foamable composition is trapped in the flow conduit between the closed valve and the closure when the actuating pressure is released and the flow conduit and closure return under the action of the bias to their closed relationship.
3. A dispenser according to claim 1 or 2 wherein the closure is at or immediately downstream of the dispensing opening.

4. A dispenser according to any one of claims 1, 2 or 3 wherein the valve is of the type in which the actuating force moves the valve stem along the valve stem axis toward the container against a closing bias, the flow conduit has a downstream open end and is wholly or partly displaceable along the direction of the stem axis, and the closure is located adjacent to this downstream open end, so that in its closed relationship the closure obstructs this downstream open end.

5. A dispenser according to claim 4 wherein the flow conduit comprises a first conduit mated with the valve stem, and a second conduit having a downstream open end,

the first conduit and second conduit comprising two telescoping sleeves, with one of the respective first conduit and second conduit being a conforming sliding fit within the tubular bore of the other, the closure being adjacent a downstream open end of the second conduit, and the first conduit is slideably displaceable relative to the second conduit,

so that in the absence of actuating force the first conduit is biased into a closed relationship with the closure to obstruct flow of composition through the downstream opening, and

on the application of actuating force to the first conduit the first conduit is displaced to actuate the valve stem and the first conduit is displaced out of its closed relationship with the closure to allow flow of composition through the dispensing opening.

6. A dispenser according to claim 5 wherein the first conduit fits slidably generally coaxial within a tubular bore of the second conduit and can slide reciprocally along the tubular bore of the second conduit.

7. A dispenser according to any one of claims 1, 2 or 3 wherein the valve is of the type in which the actuating force moves the valve stem transverse to the axis of the valve stem, the flow conduit has a downstream open end and is displaceable in a direction transverse to the direction of the stem axis, and the closure is located adjacent to this downstream open end, so that in its closed relationship the closure obstructs this downstream open end.

8. A dispenser according to claim 7 wherein the flow conduit comprises a first conduit mated with the valve stem, and a second conduit flexibly linked to the first conduit and having the downstream open end, and the second conduit is displaceable in a direction transverse to the direction of the stem axis so that such displacement is communicated to the first conduit and thereby to the valve stem.
9. A dispenser according to claim 7 wherein the second conduit is supported in a swivelling manner adjacent to the downstream open end.
10. A dispenser according to claim 8 or 9 wherein the first conduit is flexible and is mated at respectively its upstream end and downstream end with the valve stem and the second conduit.
11. A dispenser according to any one of the preceding claims wherein the closure comprises an obstructor part, and the obstructor part and conduit are biased together in the absence of actuating force into a closing relationship and are brought out of this closing relationship on displacement of the flow conduit.
12. A dispenser according to any one of claims 1 to 6 wherein the closure comprises an obstructor part adjacent to the dispensing opening, against which the downstream open end of the flow conduit is biased.
13. A dispenser according to claim 5 or 6 wherein the closure comprises an obstructor part adjacent to the dispensing opening, against which the downstream open end of the first conduit is biased.
14. A dispenser according to claim 12 or 13 wherein the obstructor part comprises a conical part with its apex pointing upstream, and engaging in a closing relationship with an end opening of the flow conduit, which is correspondingly conically profiled.
15. A dispenser according to any one of claims 7 to 11 wherein the closure comprises an obstructor part, and the conduit is brought out of the closing relationship

with the obstructer part as the second conduit is displaced transverse to the valve stem axis.

16. An actuator, being mountable on a container containing a foamable composition under pressure, the container having a valve stem with an exit opening for the composition at its end remote from the container, and which can be moved by application of actuating force to the valve stem, and by which a user can apply actuating force to the dispensing valve,

the actuator comprising,

a flow conduit defining an upstream to downstream flow path for the foamable composition, having a downstream dispensing opening which can be mated at an upstream end with the valve stem,

the flow conduit being displaceable upon the application of actuating force to the actuator to thereby bear upon a mated valve stem to actuate the valve stem,

means to communicate actuating force to the flow conduit,

a closure adjacent to the dispensing opening, wherein

in the absence of actuating force the flow conduit is biased into a closed relationship with the closure to obstruct flow of composition through the dispensing opening,

on the application of actuating force to the flow conduit the flow conduit is displaced to actuate a mated valve stem and the flow conduit is displaced out of its closed relationship with the closure to allow flow of composition through the dispensing opening.

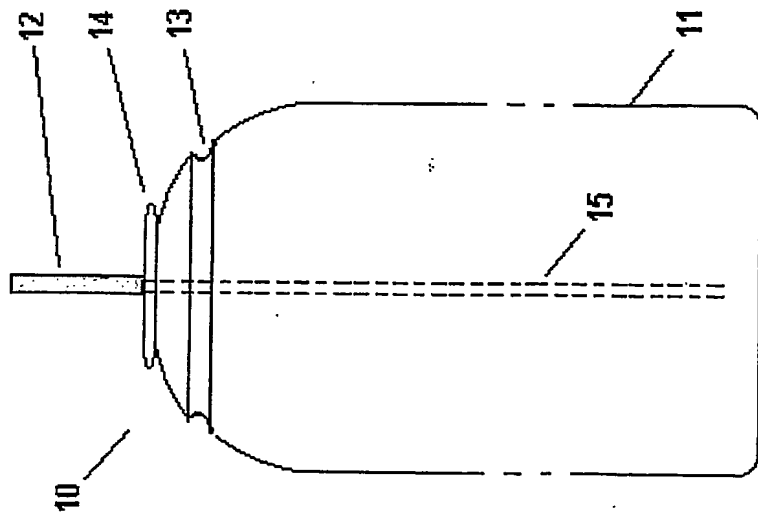


FIG. 1

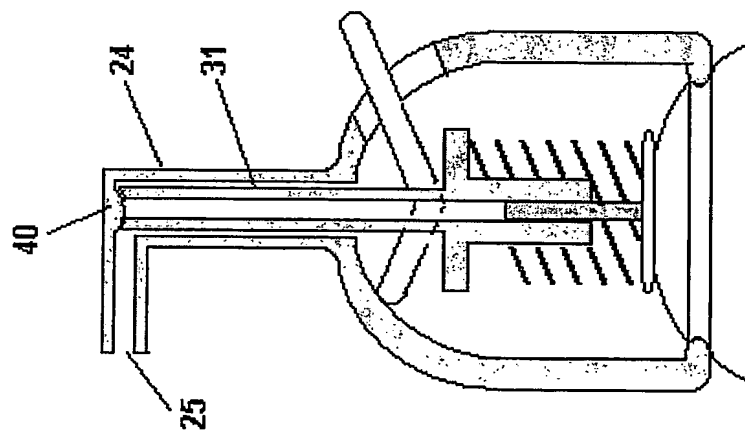


FIG. 4

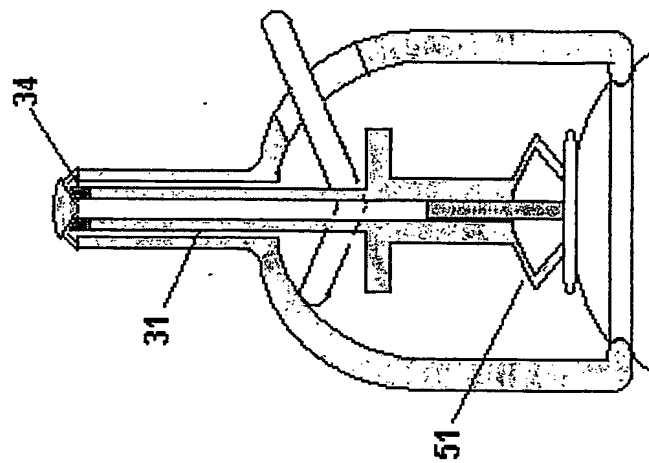


FIG. 5

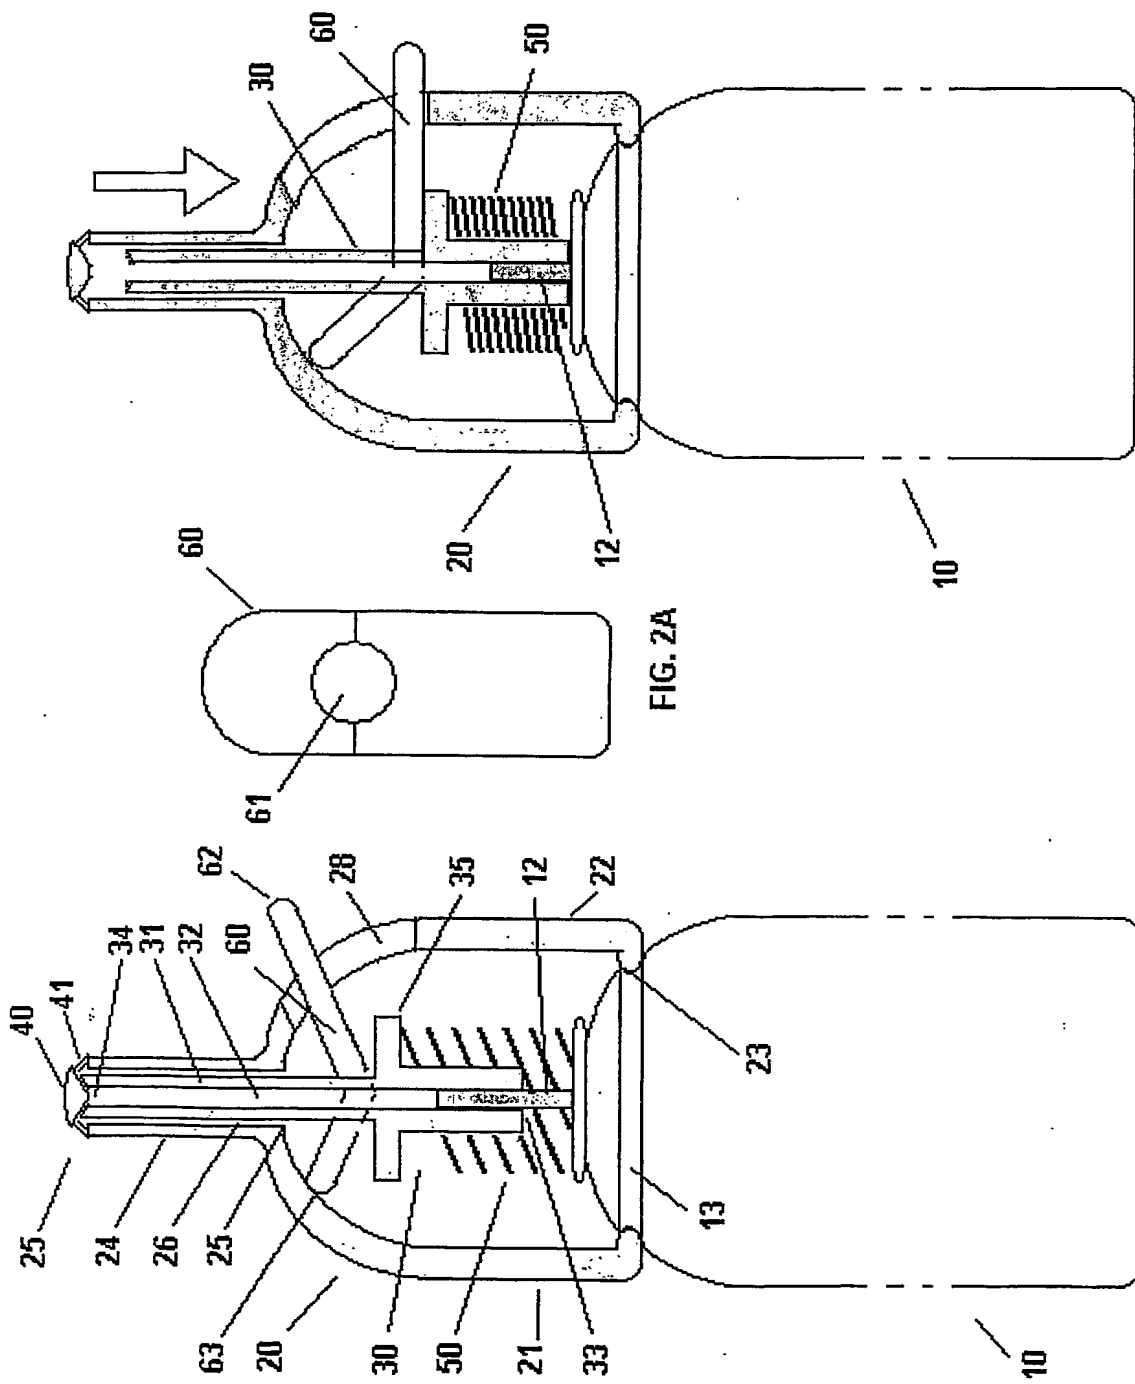


FIG. 2

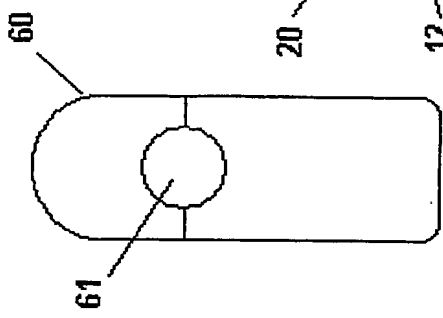


FIG. 2A

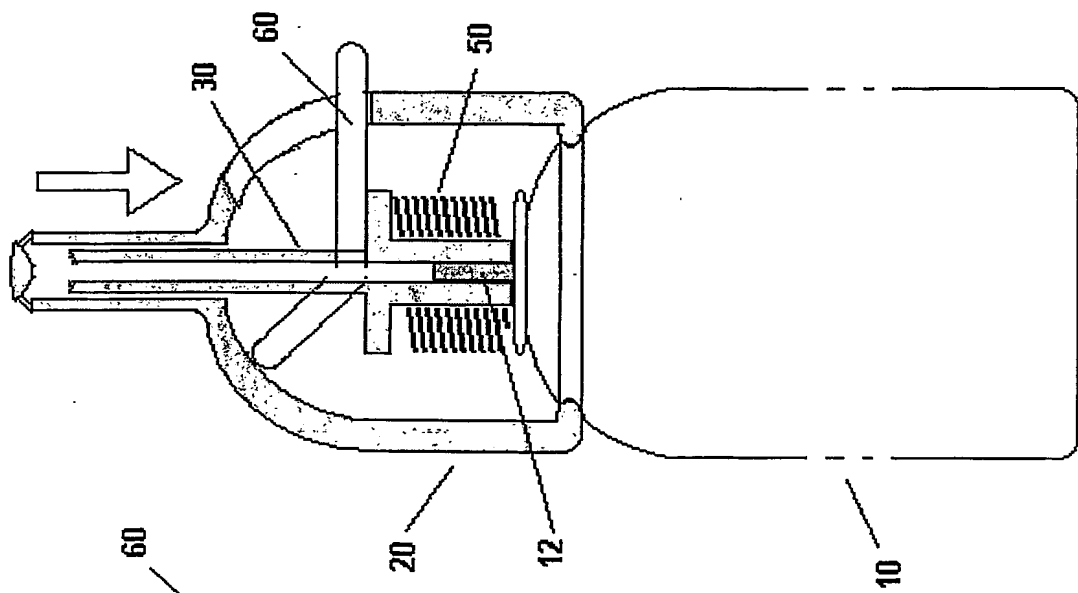


FIG. 3

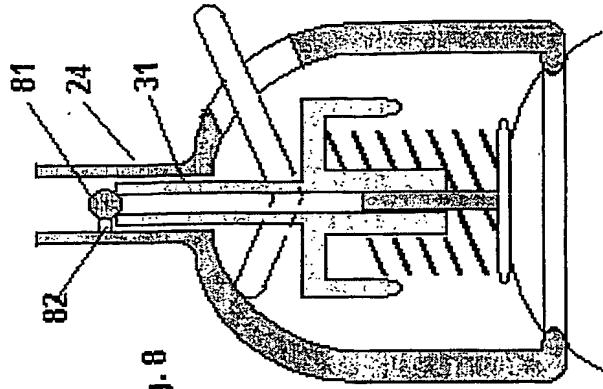


Fig. 8


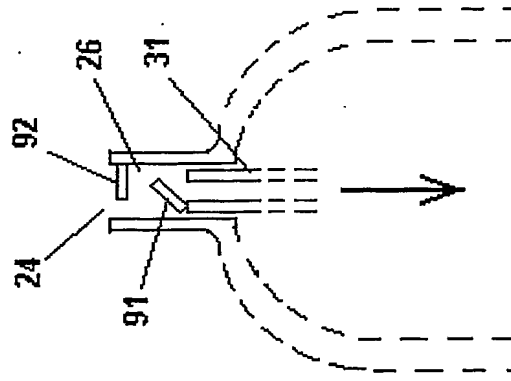


Fig. 9

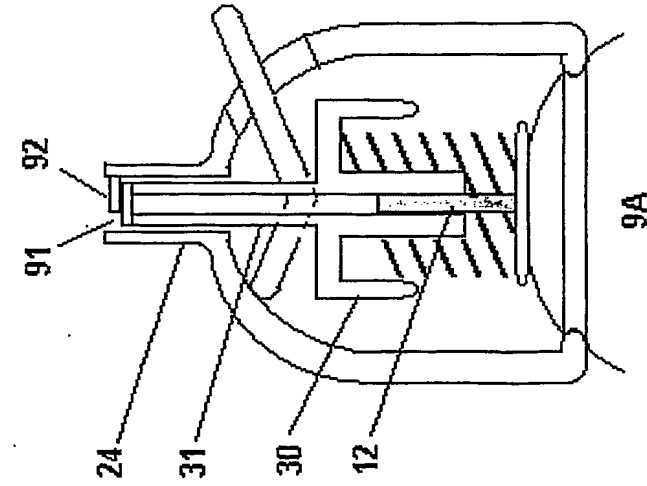

9A

92

24

91

92

91

24

31

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

24

30

12

21

31

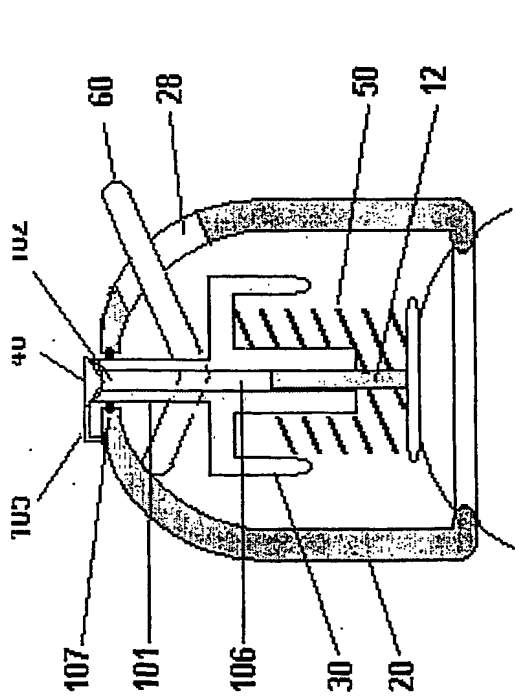


Fig. 10

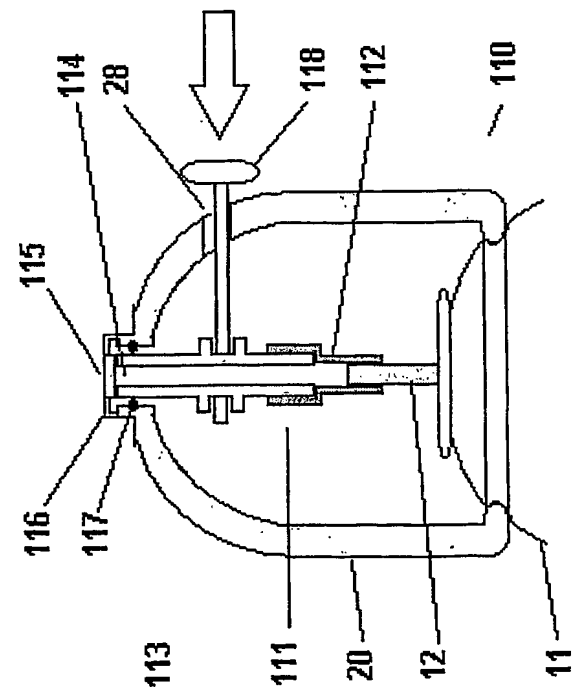


Fig. 11

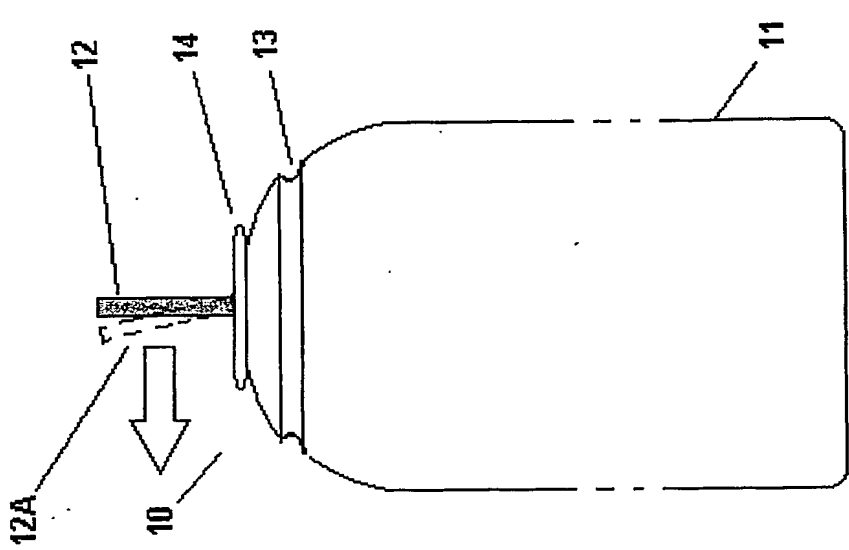


Fig. 11A

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.